PARTS LIST FOR SANSUI SPEAKER SYSTEM

SP-X700

Ref No. USP-1

SP-X7000

SANSUI ELECTRIC CO., LTD.
14-1, Izumi 2-Chome, Suginami-ku, Tokyo 168 Japan
TELEPHONE: (03) 323-1111/TELEX. 232-2076

Sansui

Front View

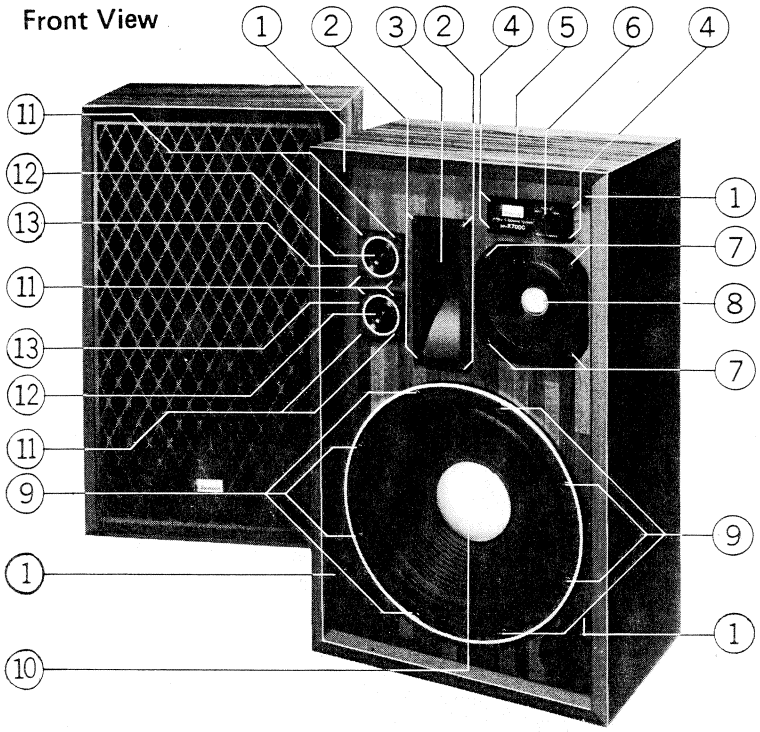

Front Grille Ass'y (14)

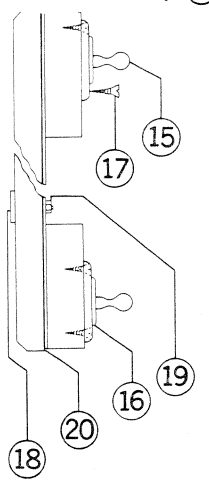

Packings

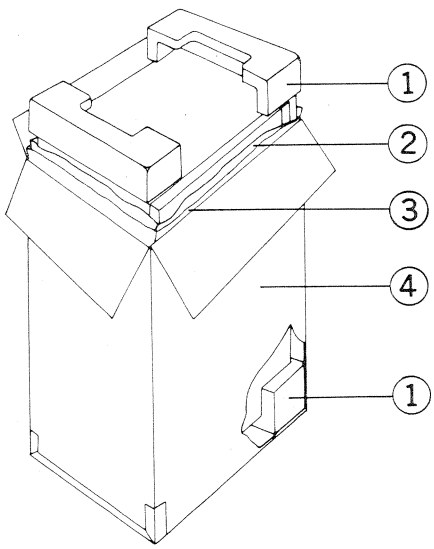

Parts List <Front View>

Parts No.	Stock No.	Description
1	5294230	Latch
2	5108930	Screw, M4 x 25mm, for mounting horn-type tweeter, T-135
	5120561	Washer
3	4430390	T-135, Horn-type tweeter
4	5164150	Screw, M3.1 x 16, for installing name plate
5	5365510	Name Plate
6	5314080	Knob for sound balance control
7	5108930	Screw, M4 x 25mm, for mounting midrange speaker, S-141
	5120561	Washer
8	4420560	S-141, Cone-type Midrange Speaker
9	5108930	Screw, M4 x 25mm, for mounting woofer, W-173
	5120561	Washer
10	4411010	W-173, Cone-type Woofer
11	5164150	Screw, M3.1 x 16mm for mounting tweeter, T-135
12	4430630	T-151, Horn-type Super Tweeter
13	5054051	Tweeter Frame
14	7180500	Front Grille Ass'y
15	5294220	Strike
16	5294060	Support for strike
17	5143818	Screw, M2.7 x 13mm for mounting support
18	5334540	Sansui Badge on front surface of the grille
19	5174030	Push-nut for installing Sansui badge
20	5344930	Grille Cloth
	7580930	Completed Frequency Dividing Network, N-175

Parts List <Packings>

Parts No.	Stock No.	Description
1	9024360	Stylofoam Packing (ea)
2	9114800	Inner Bag
3	9114850	Vinyl Bag
4	9005530	Carton Box
	3834100	Speaker Cord (ea)
	9203220	A Copy of Operating Instruction
	9290110	A List of Sansui Authorized Service Center
	9290081	Note for Limited Warranty Sansui International
		Caution Card

SP-X7000

Frequency Dividing Network

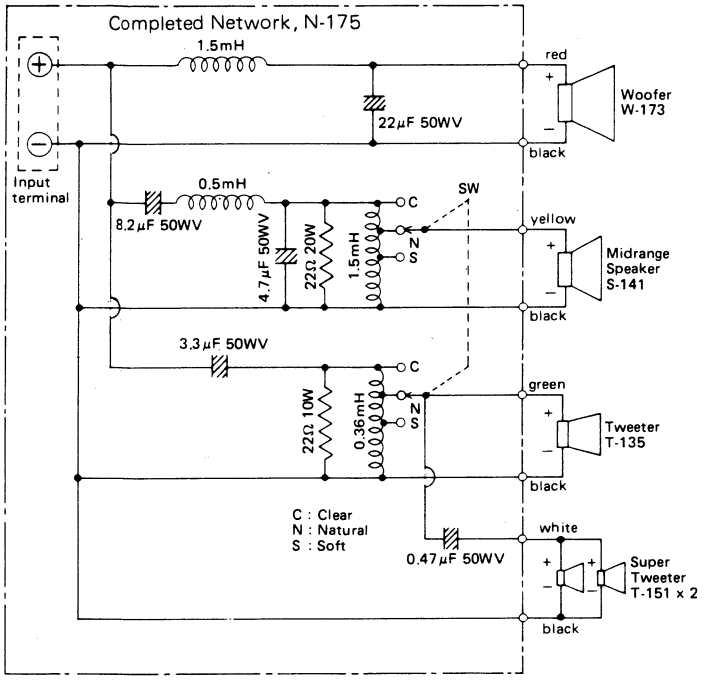

Note: Please order completed frequency dividing network, N-175, if you are in need of the following part(s) of the network.

- 0.47μF 50WV, 22μF 50WV, 4.7μF 500WV, 8.2μF 500WV, 3.3μF 500WV — Capacitor
- 0.5mH, 1.5mH, 1.5mH (with taps), 0.36mH (with taps) — Coil
- 22Ω 20W Resistor
- Rotary switch
- Input terminal

Specifications

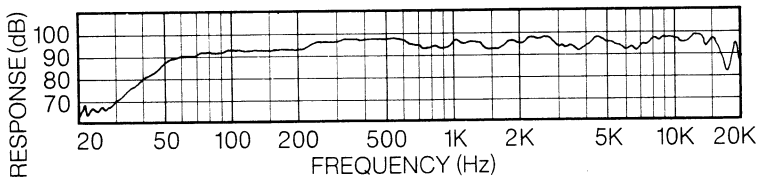

Speakers

Woofer	305mm (12") Cone-type x 1 (W-173)
Midrange	130mm (5-1/8") Cone-type x 1 (S-141)
Tweeter	154 x 50mm (6-1/16" x 2") Horn-type x 1 (T-135)
Super tweeter	45mm (1-13/16") Horn-type x 2 (T-151)
Maximum input power	130 watts
Impedance	8 ohms
Sensitivity	97dB/W (at 1m)
Frequency range	40 to 23,000Hz (in anechoic chamber) 30 to 23,000Hz (in normal listening room)
Crossover frequencies	1,500Hz, 5,000Hz, 10,000Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	389mm (15-5/16") W 639mm (21-1/4") H 280mm (11-1/16") D
Weight	17.1kg (37.8 lbs) net 19.2kg (42.3 lbs) packed

Design and specifications subject to change without notice for improvements.

Printed in Japan (O5720M)